

Cable trunking SES® with slots and base punching




GF-DIN-A7/5

CALUS
Please contact us.



GF-DIN-A7/5

Material:	Rigid PVC
Colours:	grey RAL7030 - black RAL 9005
Operating temperatures:	-5 to +65°C
Volume resistivity:	10 ¹⁵ Ω.cm
Dielectric strength:	15kV/mm
Flame resistance:	V0 UL94
Standard length:	2 meters
Double sided adhesive:	upon request
Minimum delivery:	1 complete pack (with lids)

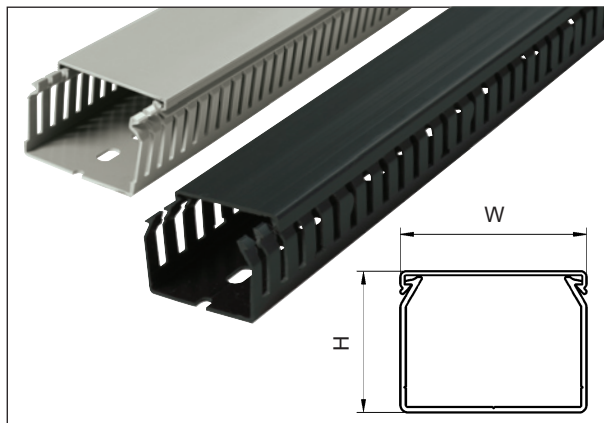


Example for order:

Colours: 013 010

code group	detail article	code colour
0845	xxxxxx	xxxx



				ext. dimensions		filling capacity		lids (alone)		
type	trunking (2 m)			H	W	no. of cables (2.5 mm ²) per per trunking	weight per metre g/m	art. no.		
		art. no.	m	mm	mm				m	
GF-DIN-A7/5 25 x 25	0845 0031 ***	48	23	23	11	340	0845 0640 ***	48		
GF-DIN-A7/5 37,5x 25	0845 0041 ***	48	35,5	23	20	587	0845 0640 ***	48		
GF-DIN-A7/5 37,5x 37,5	0845 0051 ***	24	35,5	35,5	33	997	0845 0645 ***	24		
GF-DIN-A7/5 37,5x 50	0845 0061 ***	24	35,5	48	47	1406	0845 0650 ***	24		
GF-DIN-A7/5 50 x 25	0845 0131 ***	48	48	23	27	825	0845 0640 ***	48		
GF-DIN-A7/5 50 x 37,5	0845 0141 ***	24	48	35,5	46	1 390	0845 0645 ***	24		
GF-DIN-A7/5 50 x 50	0845 0151 ***	24	48	48	65	1 955	0845 0650 ***	24		
GF-DIN-A7/5 50 x 75	0845 0152 ***	24	48	73	103	3 085	0845 0655 ***	24		
GF-DIN-A7/5 50 x 100	0845 0153 ***	12	48	98	140	4 215	0845 0630 ***	12		
GF-DIN-A7/5 50 x 125	0845 0154 ***	12	48	123	178	5 345	0845 0665 ***	12		
GF-DIN-A7/5 75 x 25	0845 0211 ***	48	73	25	45	1 346	0845 0640 ***	48		
GF-DIN-A7/5 75 x 37,5	0845 0221 ***	24	73	35,5	72	2 156	0845 0645 ***	24		
GF-DIN-A7/5 75 x 50	0845 0231 ***	24	73	48	101	3 034	0845 0650 ***	24		
GF-DIN-A7/5 75 x 75	0845 0241 ***	24	73	73	160	4 790	0845 0655 ***	24		
GF-DIN-A7/5 75 x 100	0845 0251 ***	12	73	98	218	6 546	0845 0630 ***	12		
GF-DIN-A7/5 75 x 125	0845 0261 ***	12	73	123	277	8 301	0845 0665 ***	12		
GF-DIN-A7/5 100 x 50	0845 0286 ***	24	100	48	120	3 600	0845 0650 ***	24		
GF-DIN-A7/5 100 x 75	0845 0296 ***	12	100	73	160	4 800	0845 0655 ***	24		
GF-DIN-A7/5 100 x 100	0845 0268 ***	12	100	98	220	6 600	0845 0630 ***	12		
GF-DIN-A7/5 100 x 150	0845 0269 ***	12	100	150	300	9 000	0845 0637 ***	12		

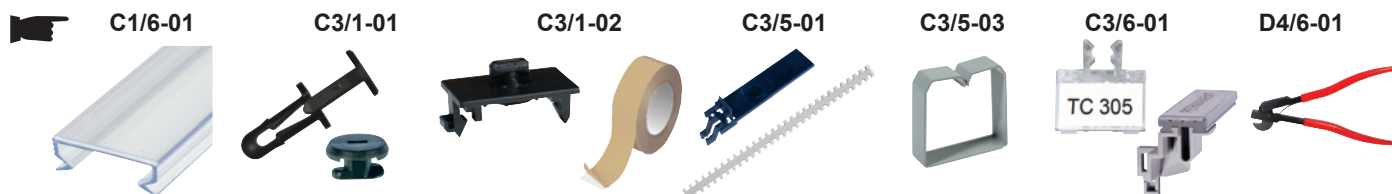




GF-DIN-A7/5



H = 25 mm

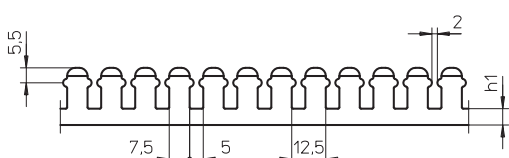



W = 25, 37,5 and 50 mm





H = 37,5 mm
H = 50 mm

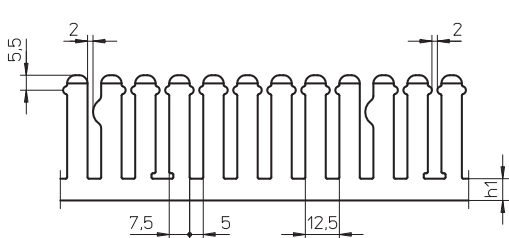



H = 75 mm

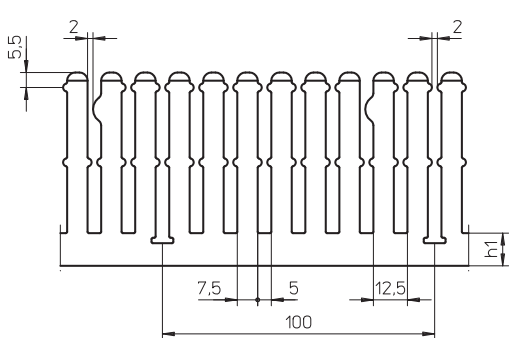

W = 75, 100, 125 and 150 mm



H = 100 mm

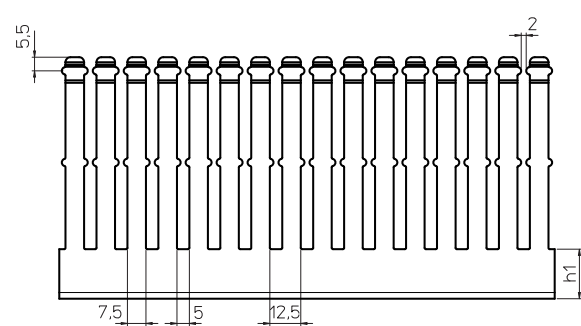

Base punching to NF EN IEC 61084

H (mm)	25	37,5	50	75	100
h1 (mm)	5	7	9	11	20



Cable trunking SES® halogen free with slots and base punching




GF-DIN-SH-A7/5



GF-DIN-SH-A7/5

Material:	PC/ABS
Colour:	light grey RAL7035
Operating temperatures:	-25 to +90°C
Volume resistivity:	10 ¹⁵ Ω.cm
Dielectric strength:	35 kV/mm
Flame resistance:	V0 UL94
Specification:	EN 45545-2 halogen free
Standard length:	2 meters
Double sided adhesive:	upon request
Minimum delivery:	1 complete pack (with lids)

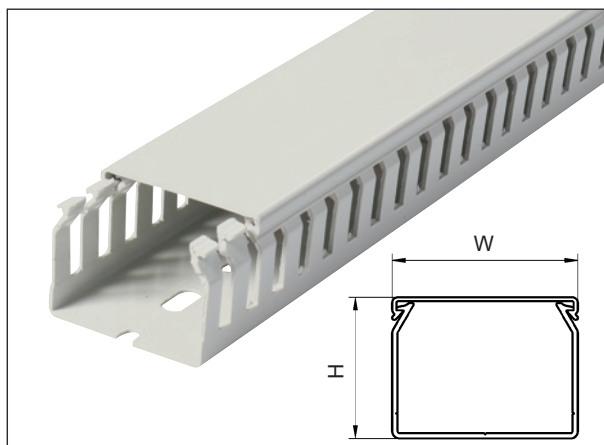

type	trunking (2 m) art. no.	 m	ext. dimensions		filling capacity		lids (alone) art. no.	 m
			H mm	W mm	no. of cables (2.5 mm ²) per per trunking	weight per metre g/m		
GF-DIN-SH-A7/5 25 x 25	0848 0031 013	48	23	23	11	340	0848 0640 013	12
GF-DIN-SH-A7/5 37,5x 25	0848 0041 013	48	35,5	23	20	587	0848 0640 013	12
GF-DIN-SH-A7/5 37,5x 37,5	0848 0051 013	24	35,5	35,5	33	997	0848 0645 013	12
GF-DIN-SH-A7/5 37,5x 50	0848 0053 013	24	35,5	48	47	1406	0848 0650 013	12
GF-DIN-SH-A7/5 50 x 25	0848 0131 013	48	48	23	27	825	0848 0640 013	12
GF-DIN-SH-A7/5 50 x 37,5	0848 0141 013	24	48	35,5	46	1 390	0848 0645 013	12
GF-DIN-SH-A7/5 50 x 50	0848 0151 013	24	48	48	65	1 955	0848 0650 013	12
GF-DIN-SH-A7/5 50 x 75	0848 0152 013	24	48	73	103	3 085	0848 0655 013	12
GF-DIN-SH-A7/5 50 x 100	0848 0153 013	12	48	98	140	4 215	0848 0660 013	12
GF-DIN-SH-A7/5 75 x 25	0848 0211 013	48	73	23	45	1 346	0848 0640 013	12
GF-DIN-SH-A7/5 75 x 37,5	0848 0221 013	24	73	35,5	72	2 156	0848 0645 013	12
GF-DIN-SH-A7/5 75 x 50	0848 0231 013	24	73	48	101	3 034	0848 0650 013	12
GF-DIN-SH-A7/5 75 x 75	0848 0241 013	24	73	73	160	4 790	0848 0655 013	12
GF-DIN-SH-A7/5 75 x 100	0848 0251 013	12	73	98	218	6 546	0848 0660 013	12
GF-DIN-SH-A7/5 75 x 125	0848 0261 013	12	73	123	277	8 301	0848 0665 013	12

C3/1-01



C3/1-02



C3/5-01



C3/6-01



D4/6-01



Cable trunking SES® with slots and base punching





GF-DIN-SH-A7/5






Please contact us.



GF-DIN-SH-A7/5

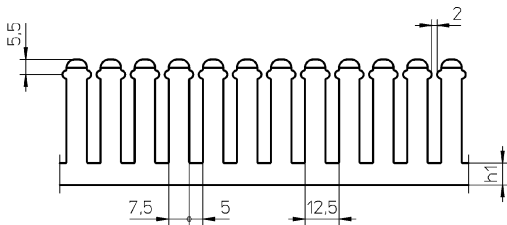

W = 25, 37,5 and 50 mm

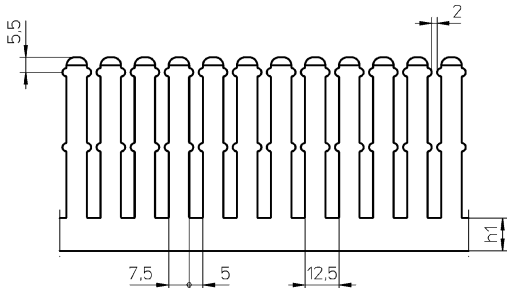

W = 75, 100 and 125 mm



Break out webs

Base punching to DIN 43659

H (mm)	25	37,5	50	75
h1 (mm)	6	8	8	12



Cable trunking SES® with slots and base punching




GF-DIN-C-A12/8

C **UL** **US**
Please contact us.



GF-DIN-C-A12/8

Material:	Rigid PVC
Colour:	grey RAL7030 - black RAL9005
Operating temperatures:	-5 to +65°C
Volume resistivity:	10 ¹⁵ Ω.cm
Dielectric strength:	15 kV/mm
Flame resistance:	V0 UL94
Standard length:	2 meters
Double sided adhesive:	upon request
Minimum delivery:	1 complete pack (with lids)

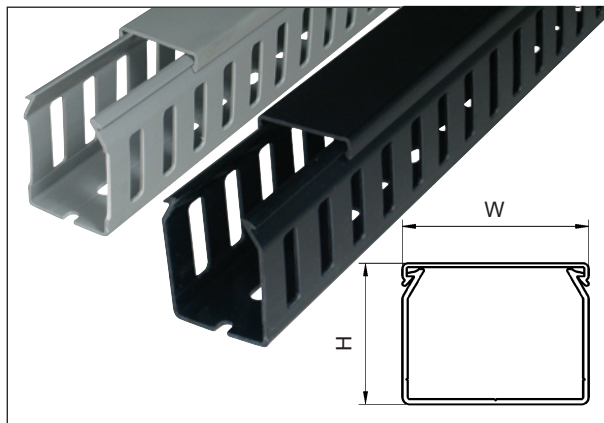

Example for order:

Colours: grey 013 black 010

code group	detail article	code colour
0845	xxxxxx	xxxx

					ext. dimensions		filling capacity			
type			trunking (2 m)		H	W	no. of cables (2.5 mm ²) per per trunking	weight per metre g/m	lids (alone)	
		art. no.	m							
GF-DIN-C-A12/8	37,5x 25	0845 0046 ***	48	35,5	23	20	587	0845 0640 ***	48	
GF-DIN-C-A12/8	37,5x 37,5	0845 0056 ***	24	35,5	35,5	33	997	0845 0645 ***	24	
GF-DIN-C-A12/8	37,5x 50	0845 0066 ***	24	35,5	48	47	1406	0845 0650 ***	24	
GF-DIN-C-A12/8	50 x 25	0845 0136 ***	48	48	23	27	825	0845 0640 ***	48	
GF-DIN-C-A12/8	50 x 37,5	0845 0146 ***	24	48	35,5	46	1 390	0845 0645 ***	24	
GF-DIN-C-A12/8	50 x 50	0845 0166 ***	24	48	48	65	1 955	0845 0650 ***	24	
GF-DIN-C-A12/8	50 x 75	0845 0167 ***	24	48	73	103	3 085	0845 0655 ***	24	
GF-DIN-C-A12/8	50 x100	0845 0168 ***	12	48	98	140	4 215	0845 0630 ***	12	
GF-DIN-C-A12/8	50 x125	0845 0169 ***	12	48	123	178	5 345	0845 0665 ***	12	
GF-DIN-C-A12/8	75 x 25	0845 0216 ***	48	73	25	45	1 346	0845 0640 ***	48	
GF-DIN-C-A12/8	75 x 37,5	0845 0226 ***	24	73	35,5	72	2 156	0845 0645 ***	24	
GF-DIN-C-A12/8	75 x 50	0845 0236 ***	24	73	48	101	3 034	0845 0650 ***	24	
GF-DIN-C-A12/8	75 x 75	0845 0246 ***	24	73	73	160	4 790	0845 0655 ***	24	
GF-DIN-C-A12/8	75 x100	0845 0256 ***	12	73	98	218	6 546	0845 0630 ***	12	
GF-DIN-C-A12/8	75 x125	0845 0266 ***	12	73	123	277	8 301	0845 0665 ***	12	



Cable trunking SES®
with slots and base punching



GF-DIN-C-A12/8

UL

US

Please contact us.

GF-DIN-C-A12/8

