

Attache-câbles SE HT à crantage extérieur pour usage à températures plus élevées

PA 6.6 noir H.T.




SES-QUICK

-40 à +110°C



• Attaches SE HT résistant aux U.V. - crantage extérieur

type	code article	dimensions long. x largeur mm	Ø de serrage maxi (mm)	résistance à la traction daN	 pcs	
110/26 SE HT-C	0186 0606 010	110 x 2,6	24	8	100	
125/47 SE HT-C	0186 0071 010	125 x 4,7	26	22	100	
160/47 SE HT-C	0186 0076 010	160 x 4,7	38	22	100	
185/47 SE HT-C	0186 0081 010	185 x 4,7	47	22	100	
300/47 SE HT-C	0186 0087 010	300 x 4,7	80	22	100	
370/47 SE HT-C	0186 0092 010	370 x 4,7	105	22	100	
210/76 SE HT-C	0186 0674 010	210 x 7,6	52	53	100	
300/76 SE HT-C	0186 0684 010	300 x 7,6	80	53	100	
370/76 SE HT-C	0186 0688 010	370 x 7,6	103	53	100	
175/90 SE HT-C	0186 0574 010	175 x 9	42	79	100	
260/90 SE HT-C	0186 0577 010	260 x 9	69	79	100	
360/90 SE HT-C	0186 0579 010	360 x 9	102	79	100	
550/90 SE HT-C	0186 0083 010	550 x 8,9	155	79	100	
780/90 SE HT-C	0186 0089 010	775 x 8,9	230	79	100	

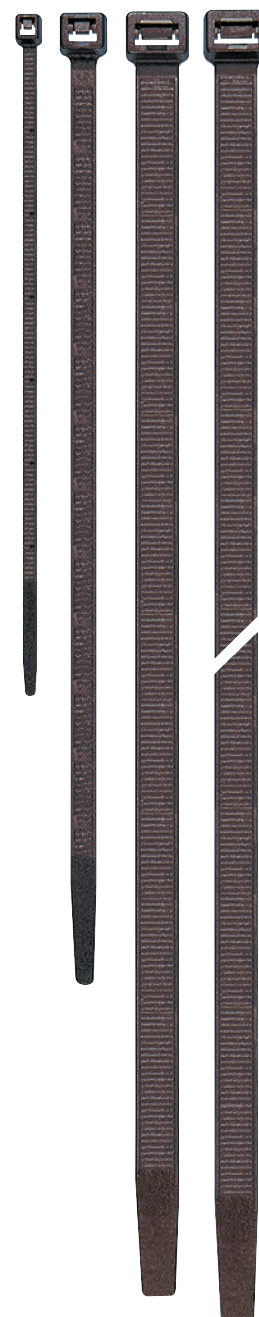

Homologué SNCF selon NFF 61-349



livré en sachet muni d'un trou européen de suspension.